Camera					
Appellation	Aluminium Bullet Camera				
Model	BAN-2AIRAHD200A-2.8	BAN-2AIRAHD200A-3.6	BAN-2AIRAHD200A-6	BAN-2AIRAHD200A-	
Image Sensor	2.0MP 1/2.7" SC2235 CMOS Sensor (XM330)				
Scanning System	Progressive				
Min. Illumination	color : 0.1Lux@(F1.2, AGC ON), 0Lux with IR Black & White : 0.01Lux@(F1.2, AGC ON), 0Lux with IR				
Shutter Speed	1/50(1/60)seconds to 1/10,000 seconds				
Lens					
Focal Length	2.8mm	3.6mm	6mm	2.8~12mm	
Visual Angle	98°	89°	56°	124°~30°	
Aperture	F2.0				
IR					
IR LED	2pcs Array IR Infra-Red Lamps , F5, 28mil, 90°				
IR Range	25m				
Wavelength	850nm				
Image					
Max. Resolution	1920(H)×1080(V)				
Video output @ FPS	AHD 1080p@30fps / 1080p@25fps				
Day & Night	IR cut filter with Auto Switch				
Back Light Compensation	Support				
Digital Noise Reduction	2D-DNR				
Wide Dynamic	N/A				
General					
Ingress Protection	TVS 2000V lightning protection, surge protection and voltage transient protection				
Material	Aluminium				
Waterproof	IP66				
Painting Style	Powder Coating				
Color	Wtite & Black				
Operation Temperature	-10℃ to 60℃				
Operation humidity	Relative humidity less than 90%				
Power	DC12V(±10%), MAX 6W				
Size	88.52*79.38*312.2mm				
Weight	750g				
Packing	535*425*263mm / 25pcs/Box				
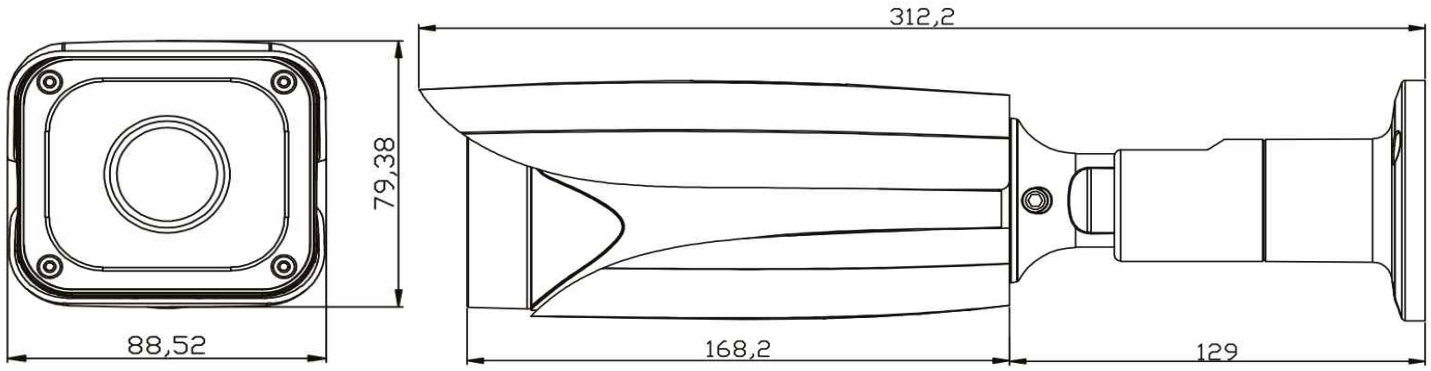
Dimensions